




# GOMTEX® USA



## Performance

- Excellent resistance to abrasion and intensive use by professionals thanks to its reinforced grooves.
- Highly resistant to oil, gasoline and a wide range of chemicals.
- Very resistant to both contact and radiant heat.
- Flexible hose even at low temperatures (-15°C).
- High breaking strength > 62 bars (900 psi) thanks to its specially-made textile.
- No maintenance or drying necessary.

## Uses

- Fire-fighting and industrial use.
- Refineries.
- Military use.
- Airports.
- Forestry.

## Construction

### Interior and exterior layer:

Specially-formulated nitrile rubber, extruded through the circular fabric. Minimal flow loss thanks to its smooth interior wall. High thermal resistance.


Reinforced grooves for better abrasion making it easy to use.

### Reinforced middle textile:

Circular weaved outer layer made from high tenacity polyester thread with breakage > 62 bars (900 psi). No defects (broken threads, knots, etc.)



# GOMTEX® USA

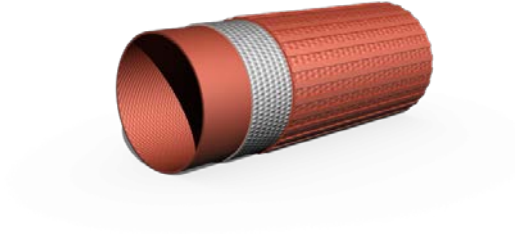

## Technical characteristics

DIAMETER		WEIGHT	THICKNESS	WORKING PRESSURE	TEST PRESSURE	BREAKAGE PRESSURE
INCHES	MM.	GR/M.	MM.	BARS	BARS	BARS
1"	25	305	2,70	30	60	>90
1 <sup>1/2</sup> "	38	480	3,10	20	40	>62
1 <sup>3/4</sup> "	45	500	3,00	20	40	>62
2"	52	590	3,00	20	40	>62
2 <sup>1/2</sup> "	64	750	3,30	20	40	>62
3"	75,5	860	3,50	20	40	>62