

CONSTRUCTION


Interior lining:

Interior lining Special lining made from a mixture of rubber and synthetic materials.

Minimal flow loss thanks to its smooth walls.

Exterior fabric:

Circular weaved outer layer made from high tenacity polyester thread with a monofilament that prevents the hose from being crushed. Flat fabric used as standard. No defects (broken threads, knots, etc.)

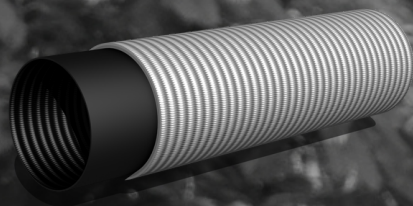

PERFORMANCE

- Very light and flexible hose.
- Easy to handle and roll up.
- Very fast flow.
- Minimal flow loss.
- Highly resistant to the flow of chemicals thanks to the interior lining's special composition.
- Highly resistant to breakage thanks to the specially-made textile.

USES

- Fire hose cabinets.
- First aid hose reels.
- Compressed air.
- Intermediate industrial processes.

NORMATIVE

- According to UNE-EN 694:2015

TECHNICAL CHARACTERISTICS

DIAMETER		WEIGHT	THICKNESS	CURVE RADIUS	WORKING PRESSURE	TEST PRESSURE	BREAKAGE PRESSURE
inches	mm.	gr/m.	mm.	cm (15 Bars)	Bars	Bars	Bars
3/4"	20	250	2,00	50	30	60	>90
1"	25	350	2,00	60	30	60	>90
1 1/4"	32	500	2,00	70	15	30	>45